



CINTILLOS DE NYLON CHS

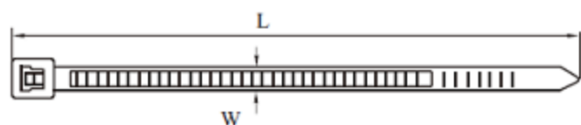

* W=White & Natural (白色)

BR=Brown (棕色)

OR=Orange (橘色)

GN=Green (绿色)

PP=Purple (紫色)

B=Black (黑色)

RD=Red (红色)

YL=Yellow (黄色)

BL=Blue (蓝色)

GY=Gray (灰色)



Underwriters
Laboratories Inc.
File E 359184

◆ Material: Nylon 66, 94V-2 certificated by UL. Acid-erosion control, insulate well. Heat-resistant and weather resistant.

◆ Operating temperature : -35°C to 85°C.

◆ Color: Natural(or white, standard color), UV black and other colors are available as requested.

Item NO.	L		W	Max.Bundle Dia. E (mm)	Min.loop Tensile Strength	
	Inch	mm	mm		LBS	KGS
CHS-3×100	4"	100	2.5	22	18	8
CHS-3×150	6"	150	2.5	35	18	8
CHS-4×150	6"	150	3.6	35	40	18
CHS-4×200	8"	200	3.6	53	40	18
CHS-5×250	10"	250	4.8	65	50	22
CHS-5×300	11 5/8"	300	4.8	82	50	22
CHS-5×380	15"	380	4.8	105	50	22
CHS-5×430	17"	430	4.8	115	50	22
CHS-5×500	19 11/16"	500	4.8	150	50	22