

Sirene elettriche industriali

Industrial electric motor sirens

V 12-24-48-110-240 ($\pm 10\%$)		50/60 Hz	On: 1 min. Off: 10 min. (BA=On ∞)
autoestinguente self-extinguishing	IP 44		
		$^{\circ}\text{C}$ -30 +40	M 16




**MINI CELEREST
MINI CELEREST BA**

MCT
MCT BA
(12) (19) (34)

V	12	24	48	110	240
A	2.7	1.47	0.85	0.37	0.22
dB(A)1m	96	97	97	95	97
Hz	1600	1600	1650	1500	1700
On:	1 min. Off: 10 min.				

V	12	24
A	1.3	0.55
dB(A)1m	92	95
Hz	1200	1300
On	∞	

MCT12DA	42060	MCTBA12D	42066
MCT24DA	42061	MCTBA24D	42067
MCT48DA	42062		
MCT110DA	42063		
MCT240DA	42065		



Kg. 0,45 - BA Kg. 0,35




**CELEREST
CELEREST BA**

CT
CT BA
(12) (19) (34)

V	12	24	48	110	240
A	9.2	7.8	3.6	0.92	0.65
dB(A)1m	104	106	106	106	107
Hz	1150	1250	1350	1300	1400
On:	1 min. Off: 10 min.				

V	12	24
A	2.5	1.1
dB(A)1m	100	100
Hz	950	950
On	∞	

CT12DA	42080	CTBA12D	42086
CT24DA	42081	CTBA24D	42087
CT48DA	42082		
CT110DA	42083		
CT240DA	42085		

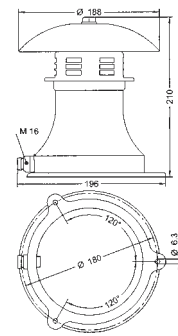

Kg. 1,5 - BA Kg. 0,9




**SUPER CELEREST
SUPER CELEREST BA**

SCT
SCT BA
(12) (19) (34)

V	12	24	48	110	240
A	13.5	7	6	1.7	1.2
dB(A)1m	113	114	115	115	116
Hz	900	900	1000	1000	1050
On:	1 min. Off: 10 min.				

V	12	24
A	9.5	5.0
dB(A)1m	113	113
Hz	820	820
On	∞	

SCT12DA	42100	SCTBA12D	42106
SCT24DA	42101	SCTBA24D	42107
SCT48DA	42102		
SCT110DA	42103		
SCT240DA	42105		

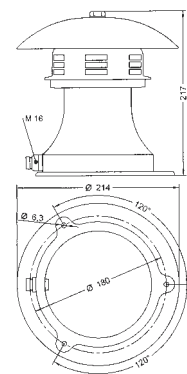

Kg. 1,9 - BA Kg. 1,8

Per ordinare l'opzione nera vedere codici su listino in vigore.
Black option available on request.

V 240-380 ($\pm 10\%$)	50/60 Hz	On ∞	IP 44		$^{\circ}\text{C}$ -30 +50	M 20
--------------------------	----------	-------------	-------	--	----------------------------	------




**CELERSON
CN 1F
CN 3F**

(14) (22) (34)

V	240	V	380
A	2.4	A	1.0
dB(A)1m	112	dB(A)1m	112
Hz	390	Hz	390
On	∞		On ∞

CN1F240A	50349
CN3F240380A	50351

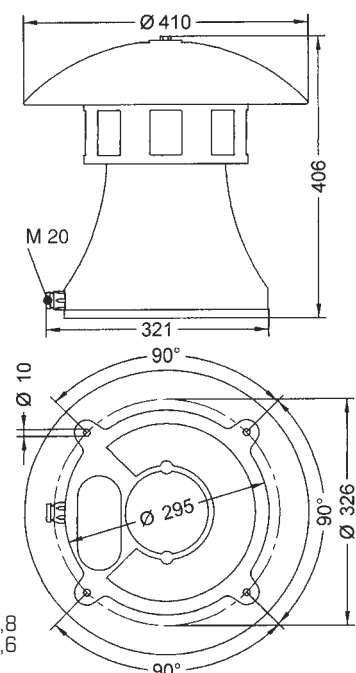

CN 1F Kg. 13,8
CN 3F Kg. 13,6